




106,5 104 1076 00 (106 a Mo 107e

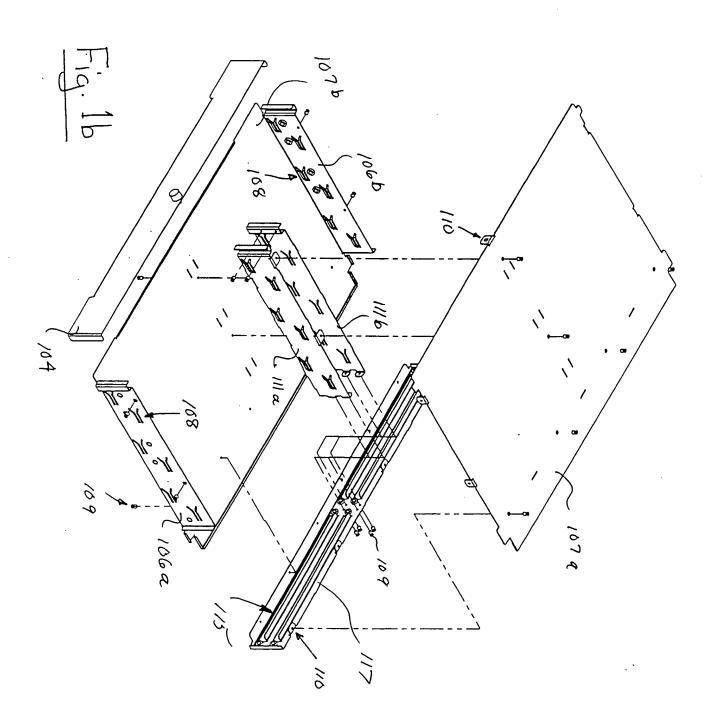

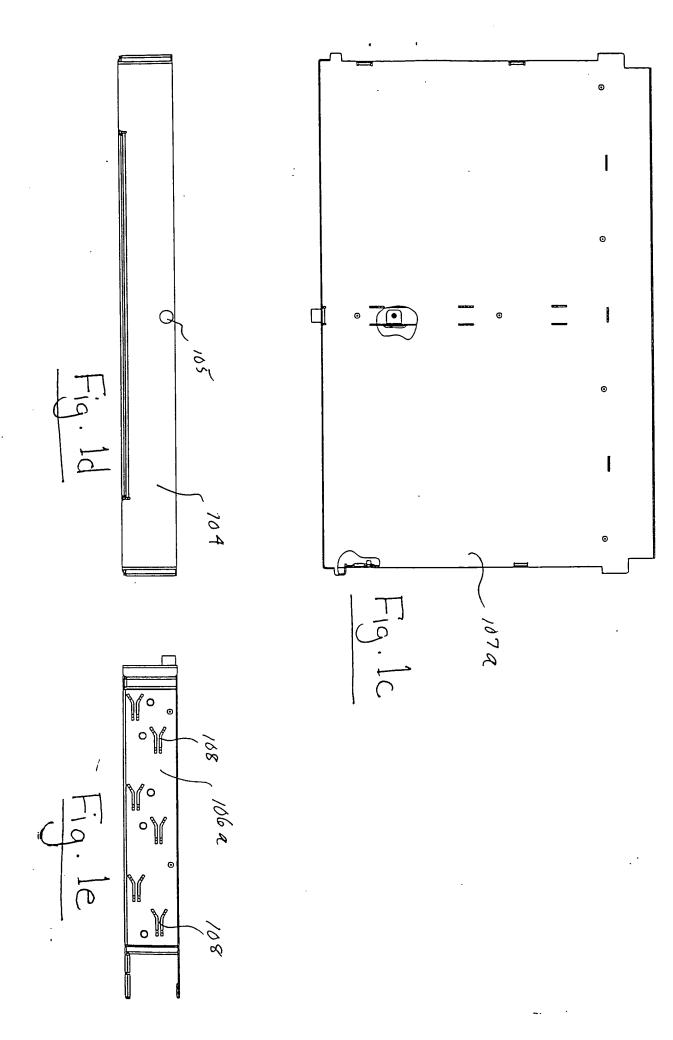


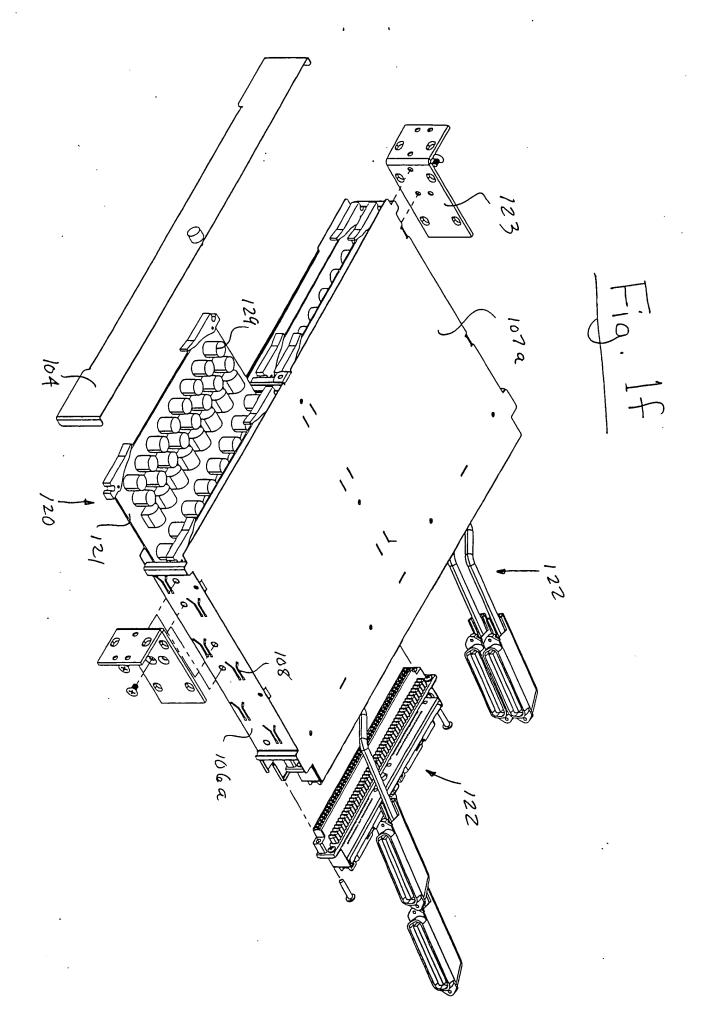


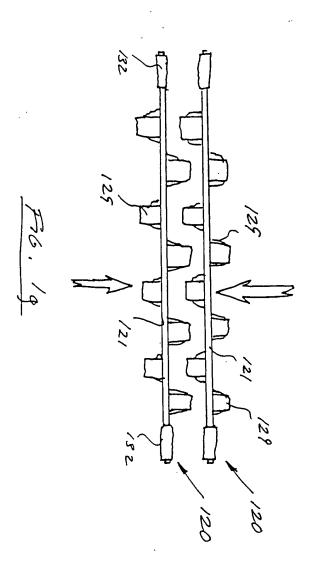


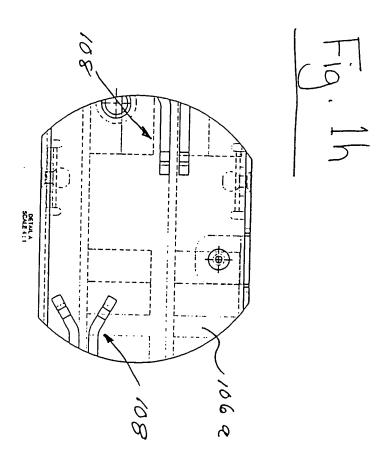



MULTI-PLANA CROSS "ROUTING

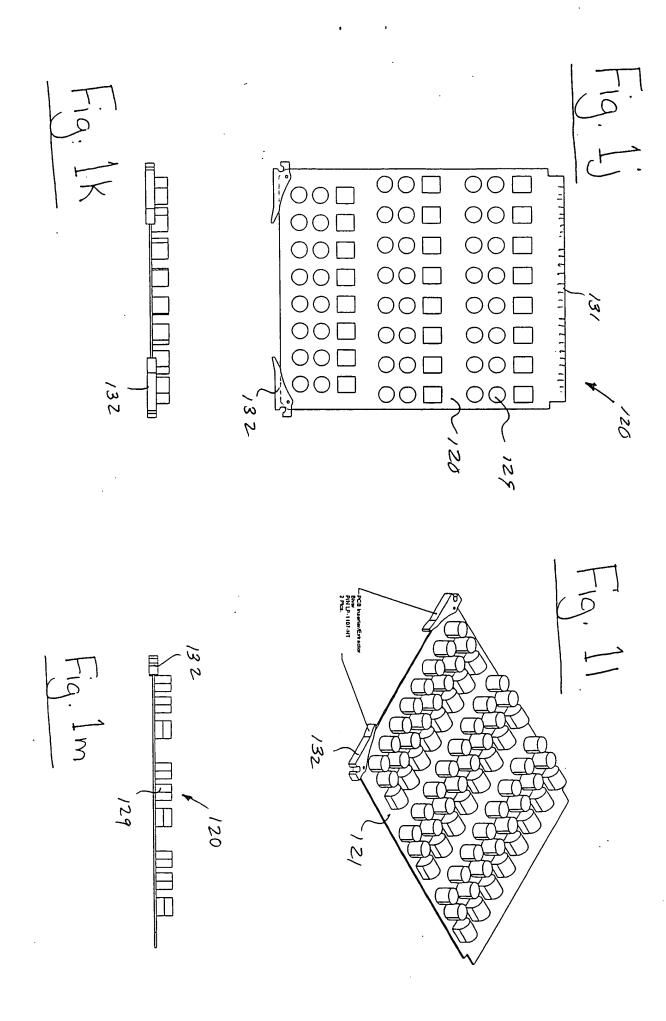


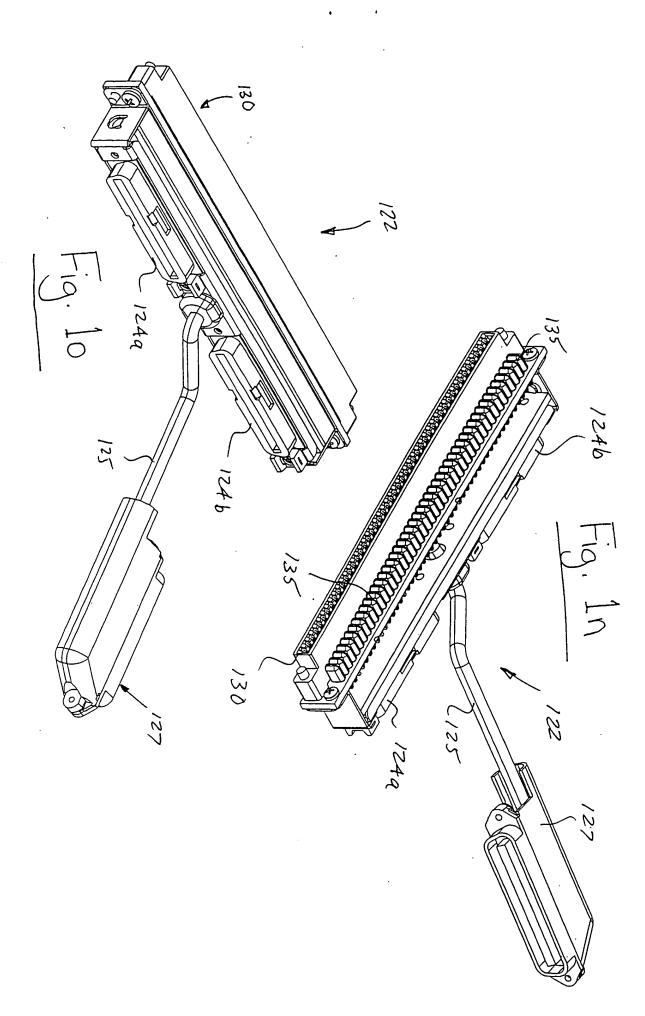


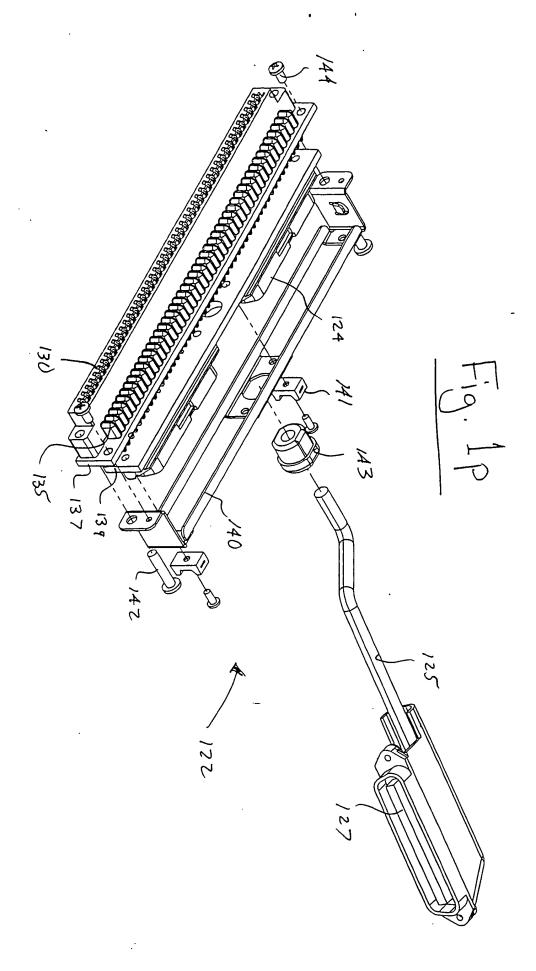


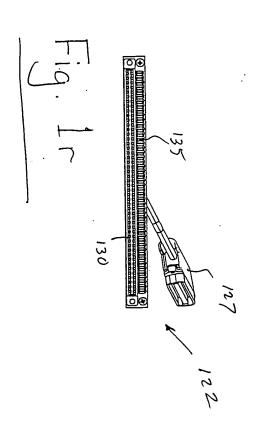


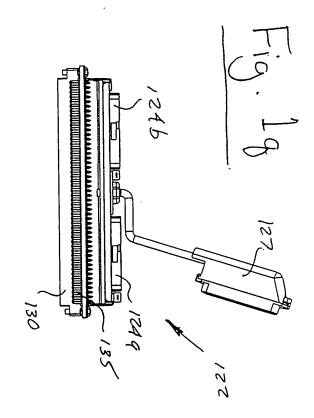





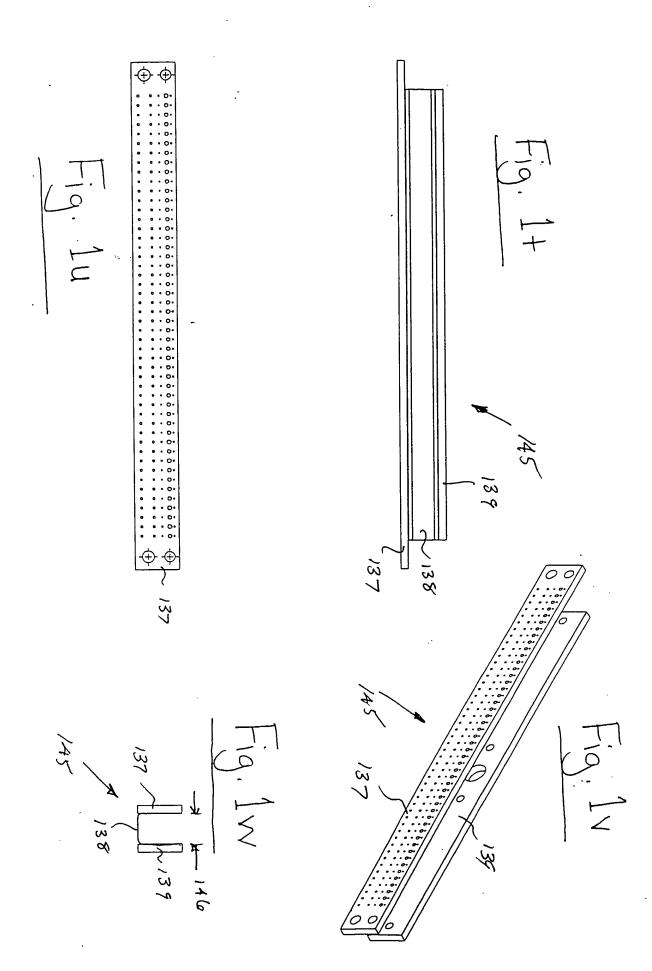

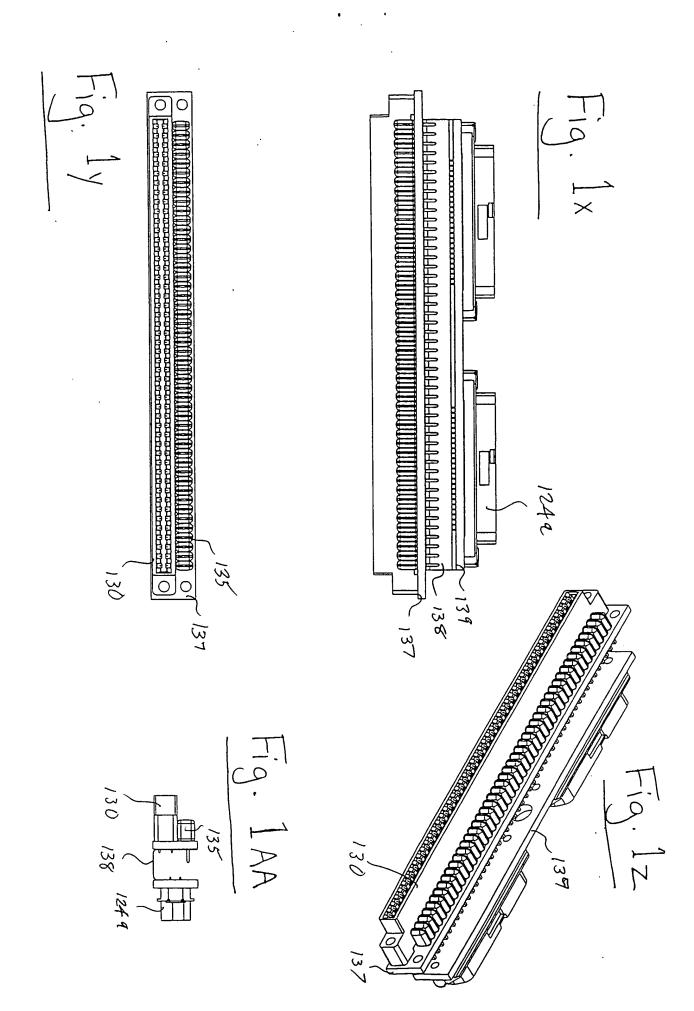

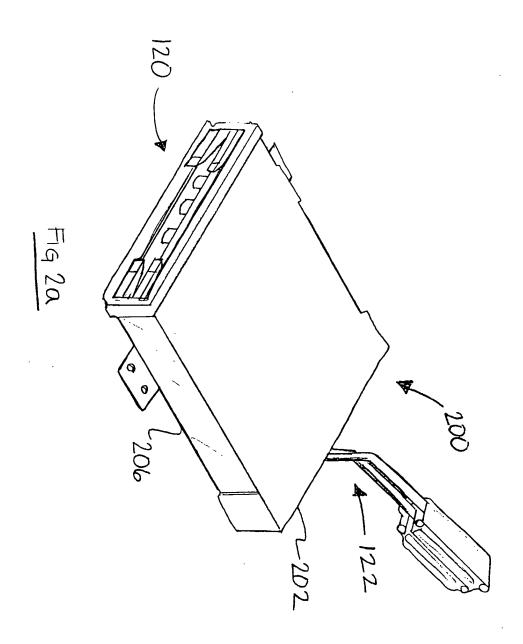

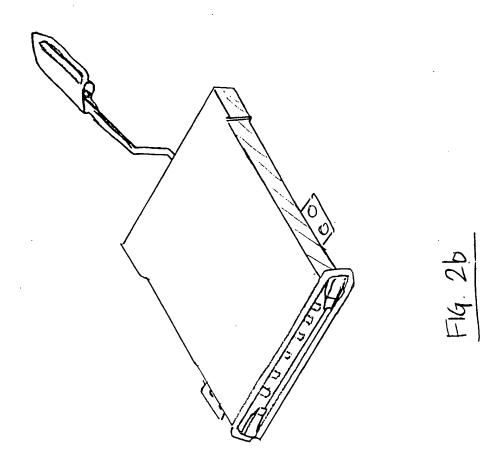


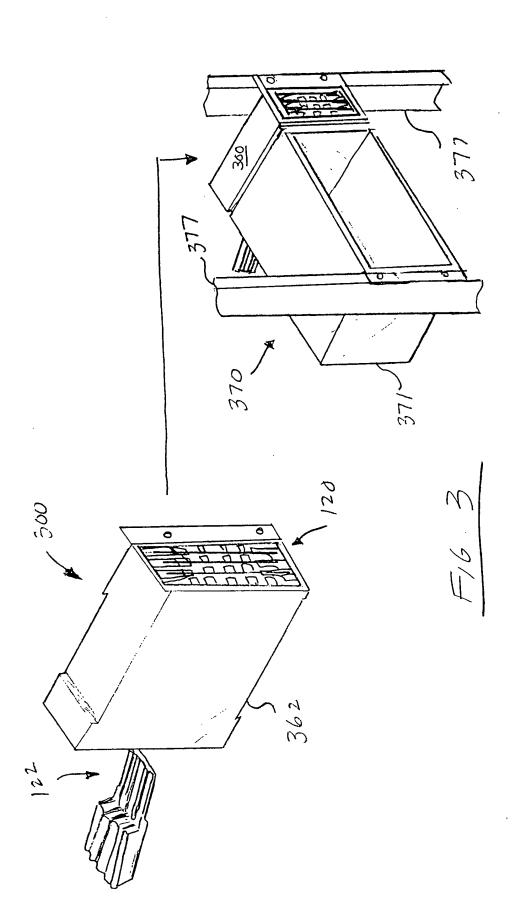


...


-:


; :...

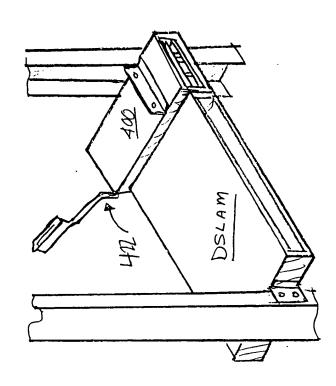


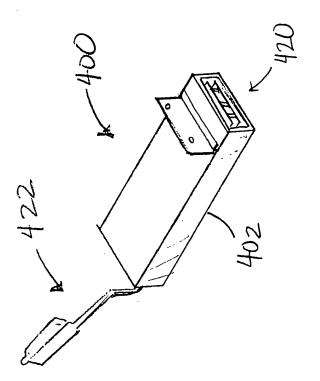


F16.4

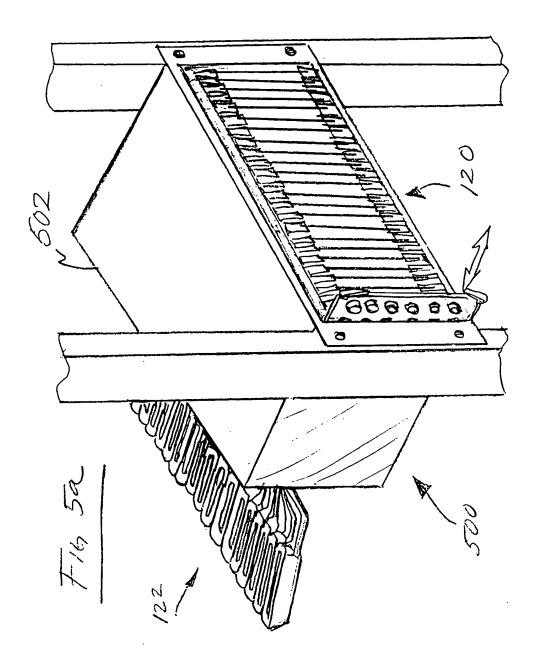


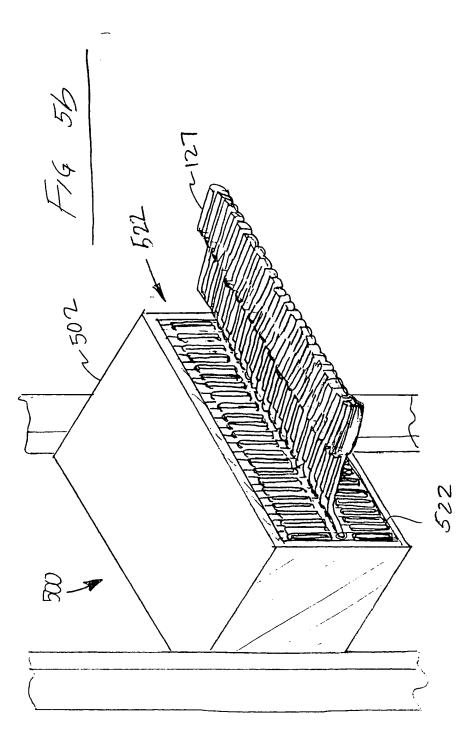


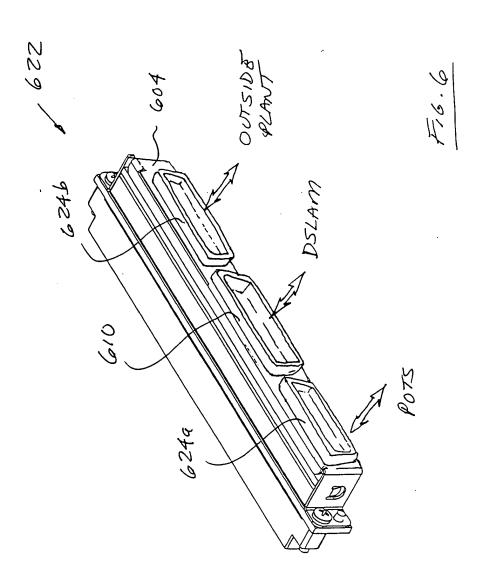

.

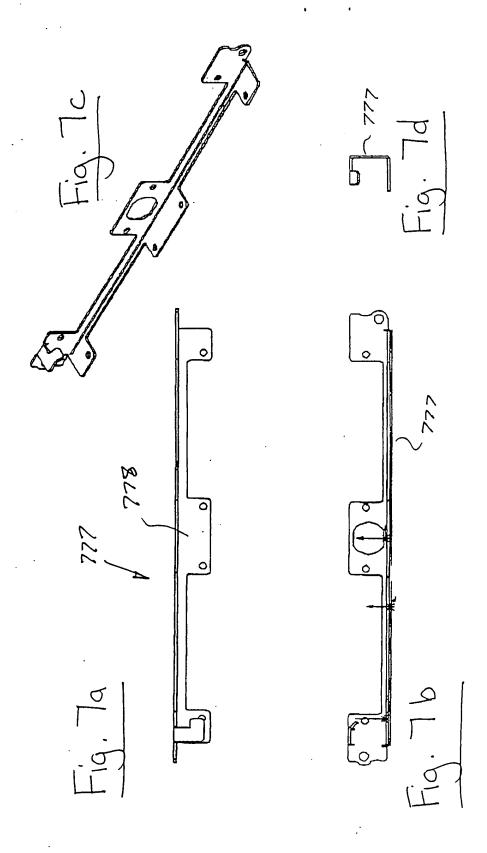


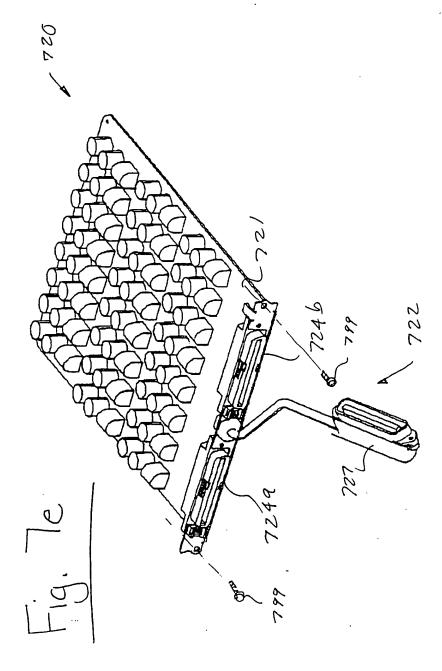

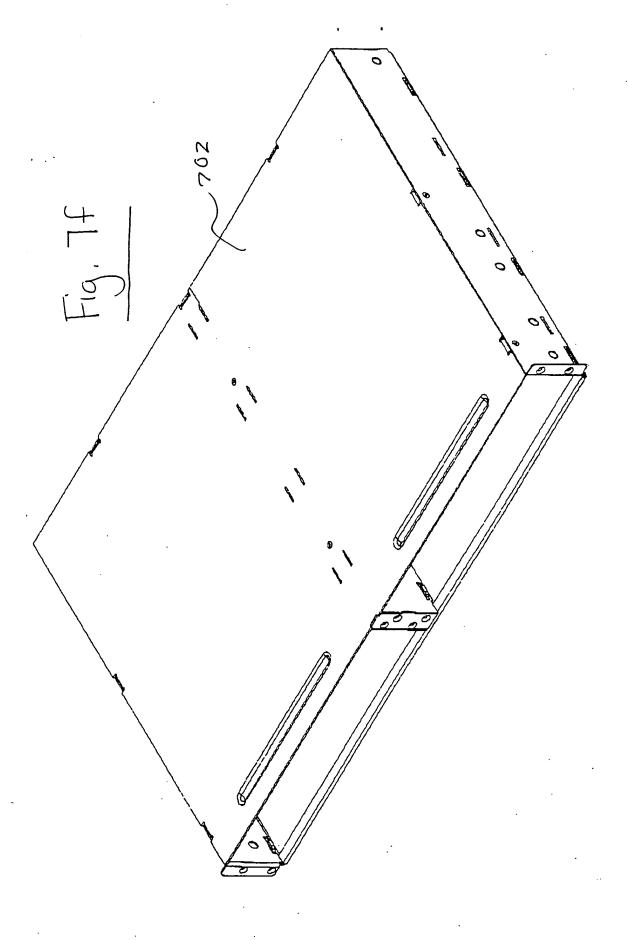


206

F19. 79



F16. 8a

UNUANTED C = CROSS TACK CAPACITANCE



F16. 86

CXN = COMPENSATING
OR CORRECTING
CAPACITANCES

F16. 9 START 900 FABRICATE INSERT SUBSTRATES ~ 952 FABRICATO CINCUIT conparous FORM CINCUTS 5 CBSTONTES Form HOUSING & HARDWARE FABRICATE BACKPLANT 1 912 ELEMENTS

